


**CISMEA
STRADALA**

**PUBLIC TAP
HYDRANT**

BRUNNEN

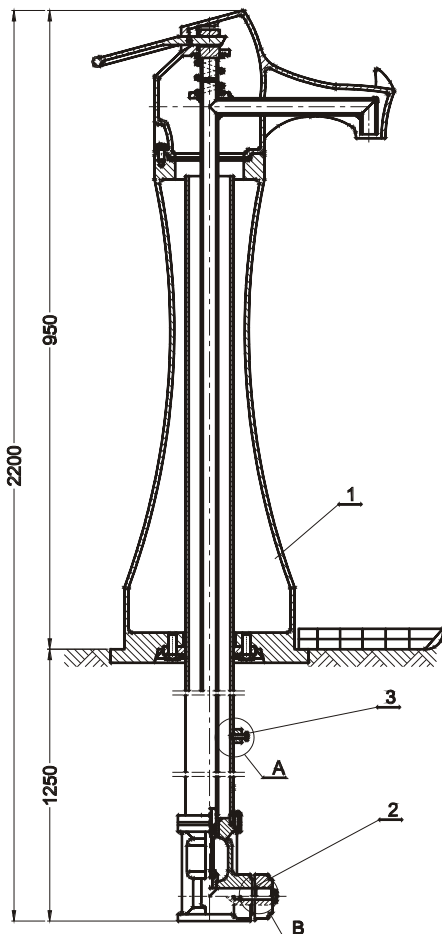

Date tehnice:

Technical data:

presiune maxima de lucru PN 16

working pressure max - PN 16

temperatura maxima de lucru: 70 °C

medium working temperature up to 70 °C

**Caracteristici
constructive:**

Design features:

coloana ciselei este fabricata din fonta sau teava din otel inoxidabil

column of the hydrant is made from iron or stainless steel pipe

este prevazuta cu sistem de golire automata a apei

automatic and complete outflow of water while cutting of the water from line

toate materialele sunt protejate impotriva coroziunii

all materials are protected against corrosion

executie satndard: vopsea epoxidica RAL5005¹ 250µm, protectie suplimentara impotriva radiatiilor UV

standard execution: epoxy paint RAL5005¹ 250µm, additional protection against UV radiation

Domenii de aplicare:

Application:

pe retelele de apa potabila

connections to the waterlines installations

Montaj:

Assembly:

sunt proiectate pentru a fi montate in pozitie verticala, pe tevi orizontale ingropate in pamant

are designed for mounting in vertical position on horizontal pipe runs buried in ground

